


# 2AR2-0BG-U-SP

## Food Grade

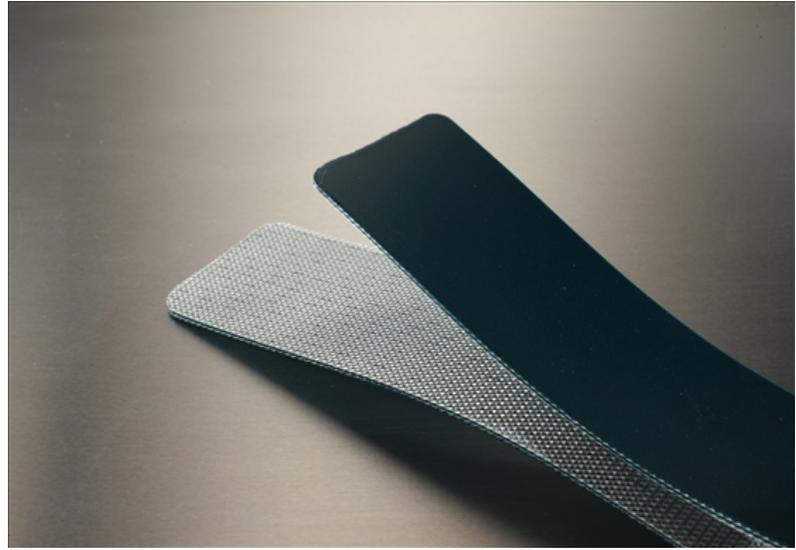

### Cover

Top Color	Blue/Green
Thickness	0.008" (0.2mm)
Material	TPU - Extruded
Pattern	Satin
Durometer	92 A

### Carcass

Plies	2
Fabric	Polyester
Anti-static	Yes
Laterally Rigid	Heavy
Pulley Side Material	Polyester with PU Impregnation

### Weight

0.024 lbs./in.-ft. (1.4 kg/m<sup>2</sup>)

### Maximum Width

126" (3.2m)

### Overall Thickness

0.059" (1.5mm)

### Minimum Pulley at 70°F

Min Pulley <180°	0.75" (19mm)
Min Pulley Reverse Bend	2" (50.8mm)

### Contact Temperature Range

-22°F to 175°F (-30°C to 79°C)

Intermittent	Contact Mol Belting
--------------	---------------------

### Working Tension

Minimum	23-34 lbs./in. (4-6 N/mm)
Maximum	90 lbs./in. (15.8 N/mm)

### Elongation

0.4% @ 23 lbs./in. (4 N/mm)
0.7% @ 34 lbs./in. (6 N/mm)
2% @ 90 lbs./in. (15.8 N/mm)

### Coefficient of Friction

Mild Steel	0.22
S/S	0.24
UHMW	0.17

### Splicing/Lacing Methods

Splicing	Finger Splice
Lacing #1	Unibar #36 SP
Lacing #2	Alligator #00

### Characteristics

FDA	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Excellent
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

### Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	No
Profile	Contact Mol Belting