


# 2AW5-0BL-SP

## Industrial Grade

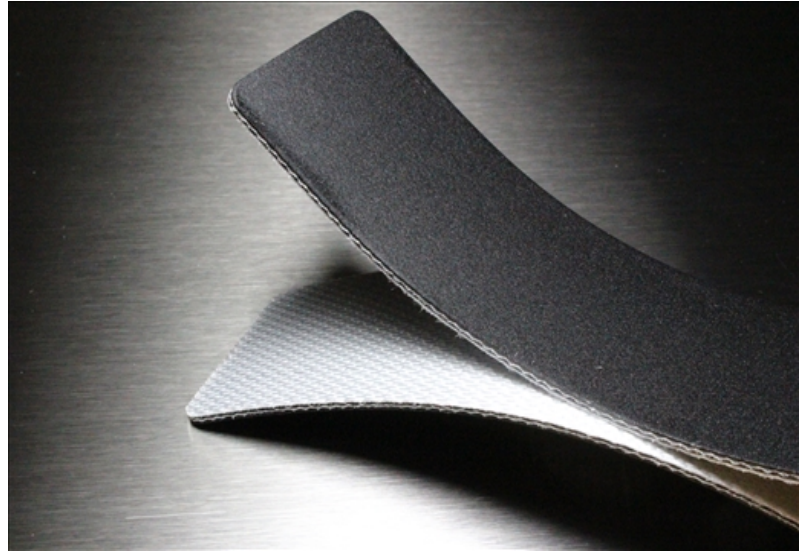

### Cover

Top Color	Black
Thickness	0.02" (0.5mm)
Material	PVC
Pattern	Satin
Durometer	80 A

### Carcass

Plies	2
Fabric	Polyester
Anti-static	Yes
Laterally Rigid	Yes
Pulley Side Material	Polyester Whisper

### Weight

0.039 lbs./in.-ft. (2.3 kg/m<sup>2</sup>)

### Maximum Width

118" (3m)

### Overall Thickness

0.078" (2mm)

### Minimum Pulley at 70°F

Min Pulley <180°	1.5" (38.1mm)
Min Pulley Reverse Bend	2" (50.8mm)

### Contact Temperature Range

5°F to 180°F (-15°C to 82°C)	
Intermittent	Contact Mol Belting

### Working Tension

Minimum	34-57 lbs./in. (6-10 N/mm)
Maximum	150 lbs./in. (26.3 N/mm)

### Elongation

0.4% @ 34 lbs./in. (6 N/mm)
0.7% @ 57 lbs./in. (10 N/mm)
2% @ 150 lbs./in. (26.3 N/mm)

### Coefficient of Friction

Mild Steel	0.22
S/S	0.24
UHMW	0.17

### Splicing/Lacing Methods

Splicing	Finger Step Finger Splice
Lacing #1	Unibar #36 SP
Lacing #2	Alligator #1

### Characteristics

FDA	No
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	No
Trough Conveying	No
Swan Neck Conveying	Fair
Metal Detectors (Dependent on Sensitivity)	Contact Mol Belting
Chemical Resistance	See Chart

### Accessories

Edgecap	No
Guide	Yes
Cleats	Yes
Sidewall	Yes
Profile	Contact Mol Belting