


TURE-2

Thermoking

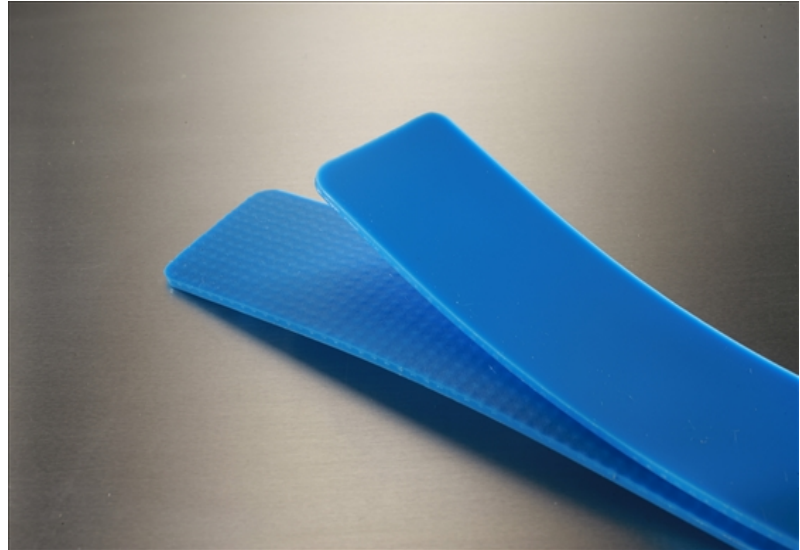

Cover

Top Color	Blue
Thickness	
Material	TPU
Pattern	Glossy
Durometer	92 A

Carcass

Plies	1
Fabric	Knit Polyester
Anti-static	No
Laterally Rigid	No
Pulley Side Material	TPU

Weight

0.044 lbs./in.-ft. (2.6 kg/m²)

Maximum Width

72" (1.8m)

Overall Thickness

0.079" (2mm)

Minimum Pulley at 70°F

Min Pulley <180°	1.1875" (30.2mm)
Min Pulley Reverse Bend	1.1875" (30.2mm)

Contact Temperature Range

-20°F to 180°F (-29°C to 82°C)

Intermittent	Contact Mol Belting
--------------	---------------------

Working Tension

Minimum	13-24 lbs./in. (2.3-4.2 N/mm)
Maximum	56 lbs./in. (9.8 N/mm)

Elongation

0.4% @ 13 lbs./in. (2.3 N/mm)
 0.7% @ 24 lbs./in. (4.2 N/mm)
 2% @ 56 lbs./in. (9.8 N/mm)

Coefficient of Friction

Mild Steel	0.4
S/S	0.42
UHMW	0.35

Splicing/Lacing Methods

Splicing	Mini Finger Splice
Lacing #1	Unibar #36 SP
Lacing #2	Alligator #1

Characteristics

FDA	Yes
USDA Dairy	Yes
USDA Meat And Poultry	Yes
Non-Marking	Yes
Flame Retardant	No
Release Characteristics	Good
Incline Conveying	No
Trough Conveying	Yes
Swan Neck Conveying	Good
Metal Detectors	Contact Mol Belting
(Dependent on Sensitivity)	
Chemical Resistance	See Chart

Accessories

Edgecap	Yes
Guide	Yes
Cleats	Yes
Sidewall	No
Profile	Contact Mol Belting